


# TONGHAND® S

Delivering unparalleled speed, precision, and performance, the TONGHAND® S Exit-Side Wrench for Horizontal Directional Drilling is as safe as it is agile. TONGHAND® S works with drill pipe and tooling from the upper range of mini rigs to the lower range of maxi rigs.

- Head unit mounts to any brand of excavator in the 18-23 metric ton class
- Patented TongVise™ easily makes and breaks joints with up to 70,000 foot pounds of torque
- TongVise™ works with pipe reamers and adapter sub connections ranging from 4.13-6.75 inches OD, and up to 8 inches OD with reduced torque ability
- Roller Arms and shift function (5.5 inches either direction) handle drill rod from 3.25-5 inches OD
- Load locking valves holds load securely regardless of hydraulic pressure
- In-cab display allows operator to safely monitor and adjust all functions, working parameters, and hydraulic settings from inside the excavator
- Requires auxiliary hydraulic circuit on excavator
- Designed to meet ASME Below-The-Hook Lifting Standards, CE-compliant and TUV tested

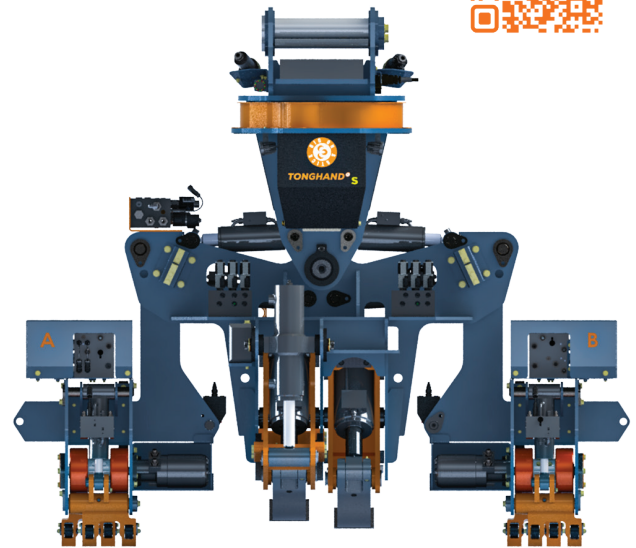

## TONGHAND® S EXIT-SIDE WRENCH

Part Number	7260
Model Number	THS
Excavator Wt Class	18-23 METRIC TON
Supply Pressure	5000 PSI / 345 BAR
Max Flow	30 GPM / 114 LPM
Min Flow	20 GPM / 76 LPM
Recommended Flow	25 GPM / 91 LPM
Capacity	5000 LB / 2268 KG
Weight	5496 LB / 2493 KG
Dimensions	96W x 60D x 85H (IN) / 244W x 152D x 216H (CM)