


DECKHAND® DHXL

A powerful partner in your most challenging pipeline and mining operations, the DECKHAND®DHXL is an all-purpose excavator attachment that easily adapts to your various job tasks to safely handle and position pipe, utility poles, road mats, piles, casings and more.

- Head unit mounts to any brand of excavator in the 60-75 metric ton class.
- Maximizes maneuverability with 360° continuous rotation, ability to shift loads 7.5 inches in either direction with integrated shift function, and tilt loads up to 14°.
- Load locking valves hold load securely, regardless of hydraulic pressure.
- In-cab display allows operator to safely monitor and adjust all functions, working parameters, and hydraulic settings from inside the excavator.
- Requires auxiliary hydraulic circuit on excavator and dedicated case drain line.
- Designed to meet ASME Below-The-Hook Lifting Standards.
- Optional stick-mounted camera allows operator to see in even the most difficult spaces.

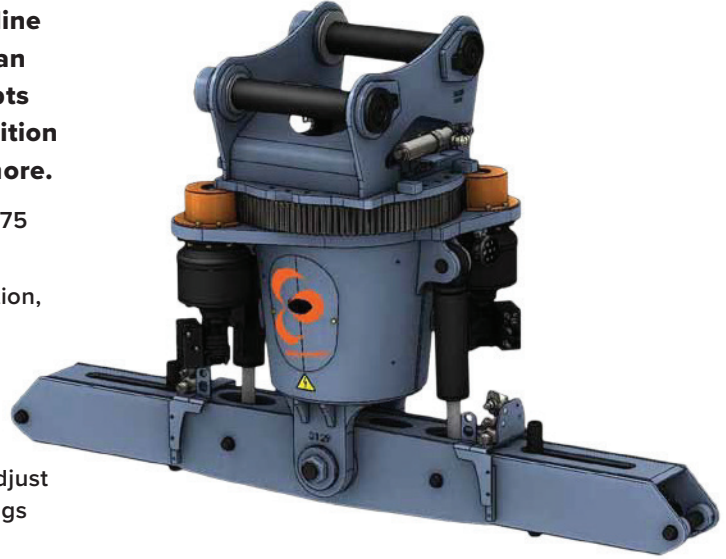

DECKHAND® DHXL HEAD UNIT

Part Number	2807
Model Number	DHXL
Excavator Wt Class	60-75 METRIC TON
Supply Pressure	3200 PSI / 221 BAR
Max Flow	40 GPM / 151 LPM
Min Flow	30 GPM / 114 LPM
Standard Recommended Flow	35 GPM / 132 LPM
Main Beam Size	10x10
Capacity	50,000 LB / 22,680 KG
Weight	4177 LB / 1895 KG
Dimensions	117L x 40W x 70H (IN) / 297L x 102W x 178H (CM)



www.lavalleyindustries.com